


REFRIGERATED UNITS

TRANSPORT

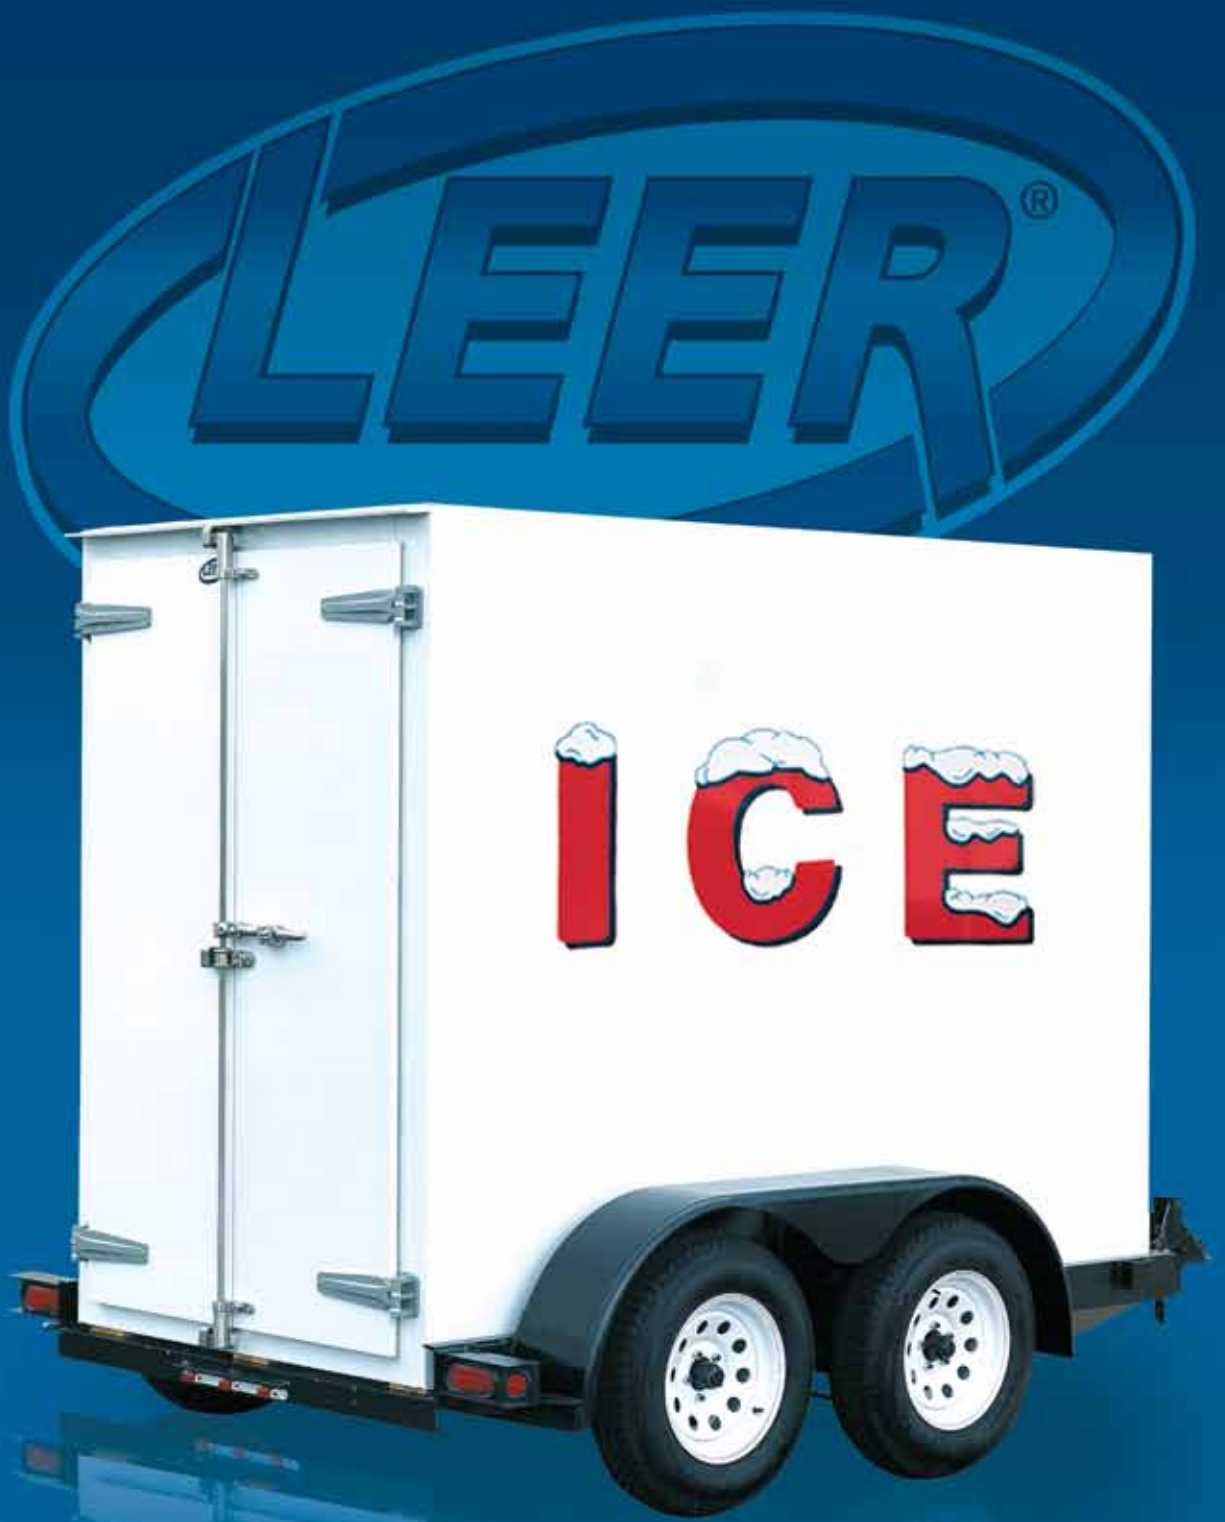

*You make the ice.
We'll help you sell it.*

| Refrigerated Transport Unit | | | Exterior Dimensions | | | Interior Dimensions | | | Door Opening | Weight | | CFC-Free Refrigeration <small>(see "options" for special refrigeration)</small> | | Truck Size Required <small>(verify truck weight capacity and box dimensions before ordering)</small> | | |
|-----------------------------|--------------------------|---------------|---------------------|-------------|-------------|---------------------|-------------|-------------|---------------------|-------------|----------|--|------|---|------------------|----------|
| Models | Capacity | | Width (mm) | Length (mm) | Height (mm) | Width (mm) | Length (mm) | Height (mm) | Width x Height (mm) | Crated (kg) | Uncrated | Size | Amps | Pick-Up (kg) | Trailer | |
| | m ³ (approx.) | Bags* (3.5kg) | | | | | | | | | | | | | Pallet Size (cm) | Quantity |
| 4 x 8 CP | 4 | 570 | 1219.2 | 2438.4 | 1803.4 | 1066.8 | 2286 | 1651 | 635 x 1447.8 | 533 | 424 | .55kw | 10.4 | 680 | X | X |
| 4 x 8 AD | 4 | 550 | 1219.2 | 2438.4 | 1803.4 | 1066.8 | 2286 | 1651 | 635 x 1447.8 | 492 | 383 | .37kw | 9.6 | 680 | X | X |
| 5 x 9 CP | 6 | 740 | 1422.4 | 2743.2 | 2108.2 | 1270 | 2590.8 | 1930.4 | 1143 x 1879.6 | 814 | 642 | .55kw | 10.4 | X | 107 X 122 | 2 |
| 5 x 9 AD | 6 | 720 | 1422.4 | 2743.2 | 2108.2 | 1270 | 2590.8 | 1930.4 | 1143 x 1879.6 | 744 | 572 | .55kw | 11.6 | X | 107 X 122 | 2 |

MODEL IDENTIFICATION

Model Letter Suffix: "CP" = Coil Plate
"AD" = Automatic Defrost

STANDARD FEATURES—ALL MODELS

- ▶ Steel cabinet construction
- ▶ High gloss polyester FDA Tonka White finish exterior
- ▶ Stucco galvanized finish interior
- ▶ 76mm-thick, CFC-free, foamed-in-place polyurethane insulation in all walls, top and bottom
- ▶ Heavy-duty powder-coated hinges and lockable latch
- ▶ Interior safety release handle
- ▶ R404A-115/1/60 semi hermetic refrigeration
- ▶ Interior lighted switch and vapor-proof light fixtures
- ▶ Thermostat control
- ▶ Dial thermometer
- ▶ 6m power cord with electric control box
- ▶ Magnetic door gaskets
- ▶ Door rain shield
- ▶ Automatic defrost or coil plate refrigeration system
- ▶ One year compressor and parts warranty
- ▶ Wood duckboard floor overlay on 4 x 8 *(see photo)*



Coil Plate Interior
(4 x 8 Shown)



* Merchandiser storage capacity may vary due to type of ice, ice bag size differences and methods of loading.

ⓘ 20 amp circuit recommended

STANDARD FEATURES 5 X 9 MODELS

- ▶ 101.6 mm thick polyurethane insulated floor
- ▶ 2mm galvanized floor surface
- ▶ Stainless steel locking door hardware
- ▶ Balloon door gaskets
- ▶ Interior door kick treadplates, pallet skid rails and pallet stop



Auto Defrost Interior
(5 x 9 Shown)

OPTIONS

- ▶ Strip curtain (recommended for -23°C freezer or 2°C cooler [R134a])
- ▶ Heavy-duty refrigeration (automatic defrost models only) 230/1/60 required for 5 x 9

NOTE:

These large-capacity, heavy-duty refrigerated transport units permit easy loading, easy access and controlled-temperature delivery for a variety of frozen or refrigerated products.

Material and product improvement is a constant commitment at Leer, Inc. These specifications are subject to change without notice and without incurring responsibility for previously sold merchandisers and components.



An Employee Owned Company

Leer, Inc. • 206 Leer Street, New Lisbon, WI 53950 • 800.766.5337 • leerinc.com

